

FEATURES

- Extracts engine oil, PSF, ATF, differential fluid, manual transmission fluid & transfer case fluid.
- Fills engine oil, PSF, ATF, differential fluid, manual transmission fluid & transfer case fluid.
- Large 6.5 GPM gear pump allows for fast extraction
- Triple gear pump design— One dedicated to extraction, one to filling, and one to draining the waste tank. No cross-contamination.
- Automatic shutoff when waste fluid tank is full
- LED indicators
- Onboard adapter organizer
- 4 casters for easy mobility
- Easy to operate
- Includes standard adapter set

SPECIFICATIONS

Power: 12V

6.5 GPM 12V D/C Gear Pump Two 3.6 GPM 12V D/C Gear Pumps Dimensions: 39"H x 17"W x 26"D New Fluid Tank Capacity: 5 Quarts Waste Fluid Tank Capacity: 20 Quarts Weight: 90 lbs.



Fingertip controlled pendant with 11' reach allows one tech service.




Adapter organizer with removable drip tray



Flex Hoses adapt to any shape>	
	() >
	\mathcal{M}
	* # #

STANDARD ADAPTERS

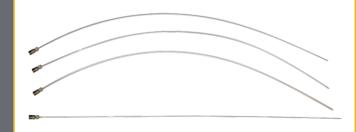

OPTIONAL ADAPTERS

Flo-Dynamics, Inc. • 3300 Reedy Drive • Elkhart, IN 46514 • 800-303-5874 • www.flodynamics.com

G-U-MAX

AC-U-MAN